
ArmaMeshLOUVRE

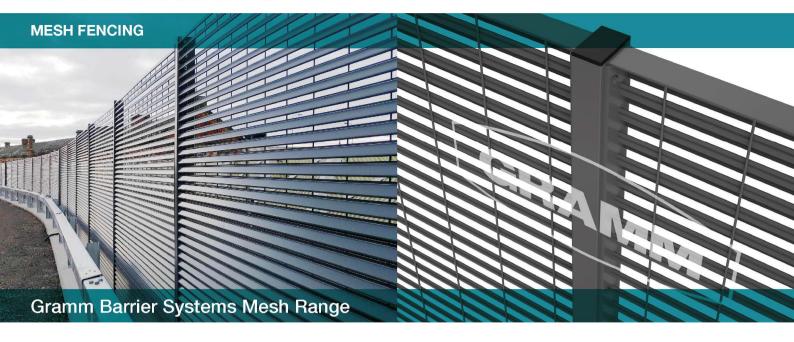

When limiting the visibility of your premises is as important as preventing people from intruding, choose ArmaMeshLOUVRE fencing. This Louvered Fence Panels system combines exceptionally stylish and modern panels with features designed to protect high level security sites including hospitals, airports and corporate developments.

Technical specifications

Height	80/20 vision 954mm/1183mm/1596mm/1963mm (fencing can be made up of a combination of the above panels) * delete as required 100/0 vision 967mm/1196mm/1608mm/1975mm
Nominal Height	1.0m/1.2m/1.6m/2.0m (fencing can be made up of a combination of the above panels
Mesh & Wire	80/20 vision Electrofused steel S235JR made up from triple flanged 50 x 1.5mm flat bar at 46mm centres vertically and 4mm wire at 132mm centres horizontally. Top and Bottom constructed from 50 x 3mm flat bar. Galvanised and polyester powder-coated to a minimum of 60 microns. 100/0 vision Electrofused steel S235JR made up from triple flanged 69 x 1.5mm flat bar at 46mm centres vertically and 4mm wire at 132mm centres horizontally. Top and Bottom constructed from 50 x 3mm flat bar. Galvanised and polyester powder-coated to a minimum of 60 microns
Post	RHS or SHS depending upon application (please contact Gramm Barrier Systems for full details)
Fixings	Depending on application (please contact Gramm Barrier Systems for full details)
Set Posts	Set posts in holes 300 mm diameter x 800** mm deep, filled not less than half the depth with concrete, as clause 620
Maximum Posts Centres	1642mm/2032mm (panel width 1992mm)
Bottom of Fencing to Be	Maximum of 100 mm above final ground level
Other Requirements	PPC Colour Green RAL 6005. A full range of RAL Colours are available from Gramm Barrier Systems including marine grade and metallics

A range of options allow you to customise the innovative ArmaMeshLOUVRE fencing to meet your security needs. Each 1963mm wide panel is available in any height, and you can choose different visibility levels based on the angle of the louvres. The 80/20 option provides 80% screening with 20% visibility, while the 100/0 option provides 100% total screening with zero visibility.

The robust profiled Louvered Fence Panels are fused to a steel wire with a high electrical voltage to maximise security and durability in all conditions. There's also the option to have panels fitted horizontally or vertically, giving you complete control of how ArmaMeshLOUVRE appears.





East Sussex South East Wales & West